




PIONEERS OF
PROFESSIONAL
OUTDOOR
KITCHENS



DCS Invented the Art of Outdoor Grilling

Building on a heritage of commercial-quality appliances, DCS has pioneered a new category in outdoor cooking since the 1980s—beyond traditional barbecues. The series has been conceived as a complete professional outdoor kitchen, the heart of which is the Grill. DCS Outdoor products are engineered to deliver the functionality and power demanded by a professional chef; and are hand-finished to perfection to complement the quality of your premium outdoor kitchen. DCS Outdoor products are built to withstand the demands of the serious cook and the extremes of mother nature.

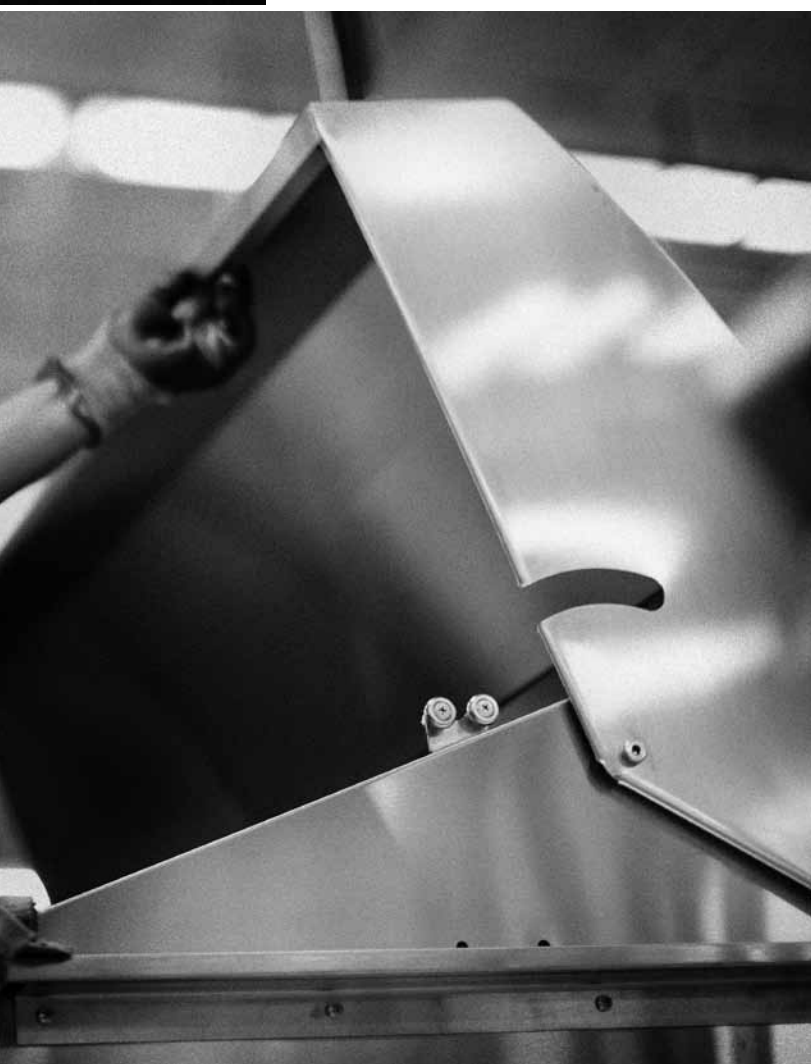



PERFECTING
THE ART
OF GRILLING
SINCE 1989



You don't have to be a professional chef to cook like one

Professional means different things to different people. For DCS it's about design that delivers, construction that lasts a lifetime and performance that is consistent. Professional is something close to our hearts, because it's where we started—in professional kitchens. Professional is not for everyone. It is uncompromising in its simplicity, unparalleled in its performance and unconventional in its resilience. For DCS, professional means power, simplicity and control.







The Power Behind America's Test Kitchen

Since October 2008, over 88 DCS appliances have been used daily on the television sets of *America's Test Kitchen* and *Cook's Country from America's Test Kitchen* — two of America's most popular cooking shows. Cast members and test cooks put DCS appliances through their paces every day, in the most rigorous test kitchen environment.

americastestkitchen.com

© 2015 America's Test Kitchen.
All rights reserved.







GRILLS



Grills

The DCS Grill is unparalleled in delivering intense heat, low heat and easy cleanability. DCS Grills feature full surface searing rather than uneven hotspots, providing even temperatures across the entire grilling surface—up to 48" wide.

The 36" and 48" Grills feature double-sided cast stainless steel grilling grates; one side has a gentle radius for handling delicate foods, while the other side is W-shaped for perfect sear lines. The patented Grease Management System™ grease channeling technology reduces flare-ups by directing grease and oils away from the burner flames during grilling.

Precision ported stainless steel burners deliver an impressive 25,000BTU/hr of power to a layer of ceramic rods, which in turn provide intense heat to the stainless steel grilling grates, meaning you are cooking with controlled heat rather than direct fire.

Selected models have a dedicated sealed Smoker Tray, heavy duty Infrared Rotisserie and Smart Beam™ Grill Light to expedite the most advanced grilling recipes.

As the heart of your outdoor kitchen, the DCS Grill has been developed in conjunction with a comprehensive choice of side burners, refrigeration and storage products to complete the professional outdoor kitchen in your backyard. Constructed from 304 grade stainless steel, DCS Grills are built to last.





Pictured:
48" Grill with Rotisserie: BGC48-BQAR
Grill Griddle Plate: BGC-GP

Grill Features



Full Surface Searing

All DCS Grills feature full surface searing, rather than uneven hotspots. A combination of precision ported stainless steel burners, ceramic radiant rods and heavy gauge stainless steel burner box construction ensure precise, even searing temperatures across the entire grilling surface.



Double-sided Cast Stainless Steel Grilling Grates

The 36" and 48" Grills feature double-sided cast stainless steel grilling grates. One side has a gentle radius for handling delicate foods. The other side is W-shaped for perfect sear lines while channeling oil away to an easily removable drip tray.



2x

Sear Surface Options

25K

BTU Burners

304

Grade Stainless
Steel Burners



Ceramic Radiant Technology

An entire layer of ceramic rods are placed between burners and grill grate. These provide intense yet even heat, meaning you are cooking with controlled heat rather than direct fire. On DCS Grills there is little variance in temperature zones and the total grilling surface is very consistent.



Stainless Steel Burners

The precision ported U-shaped stainless steel burners are rated at a massive 25,000BTU/hr each, offering premium quality and performance. Each burner is ignited by a dedicated cross fire igniter. A heat shield directs heat upwards maximizing heating efficiency.



Direct Burner Ignition

DCS Grills include an ergonomic ignition solution, where burners are lit directly from the corresponding knobs, eliminating the need for a surface ignition button.

3500
BTU Burner



Dedicated Sealed Smoker
The 36" and 48" Grills have a dedicated smoker tray with a direct 3,500BTU burner offering a clean, convenient option for specialized smoking recipes.



Rotisserie
DCS Rotisserie Grill models include a dedicated infrared rotisserie burner, providing controlled searing heat up to 18,000BTU. The heavy-duty rotisserie motor powers a stainless steel hexagonal rod and adjustable forks, which can securely accommodate a 50lbs load.

50lbs
Rotisserie
Capacity



Grease Management System™ Grease Channeling Technology

This patented Grease Management System™ grease channeling technology reduces flare-ups by directing grease and oils away from the burner flames during grilling.



Smart Beam™ Grill Light

A 40W halogen light is integrated into the patented weather-proof rotisserie motor of DCS Rotisserie Grill models. The Smart Beam™ Grill Light is designed to illuminate the entire cooking surface for perfect night grilling.



Drip Pan

DCS Grills feature a removable drip pan, conveniently located in a slide-out tray to allow for easy cleaning.

1x
Removeable
Drip Pan


Ceramic Radiant Technology

DCS Grills feature a triple-layered burner technology, resulting in intense yet even heat across the entire grilling surface.


Most grills allow gas flames to heat the grilling grates directly, meaning a high rate of dangerous flare-ups. DCS Grills employ a layer of ceramic rods between the powerful gas burners and stainless steel grates. This ceramic layer quickly heats to high temperatures, in turn transferring heat to the grilling surface. As a result you are cooking with controlled heat across the entire surface, rather than direct fire in uneven hotspots.

Ceramic Radiant Technology also works to reduce flare-ups. Any drippings not channeled away by the grates are incinerated on the rods, eliminating fuel for flare-ups.

Double-Sided Grilling Grates

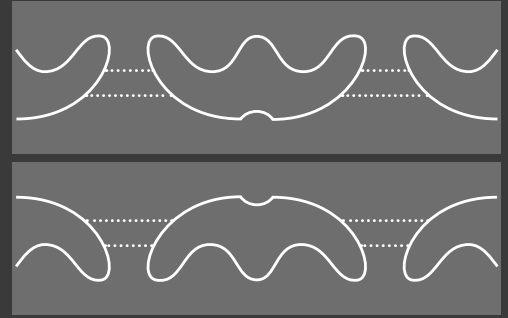


W-shaped for maximum grease capture and perfect sear lines.

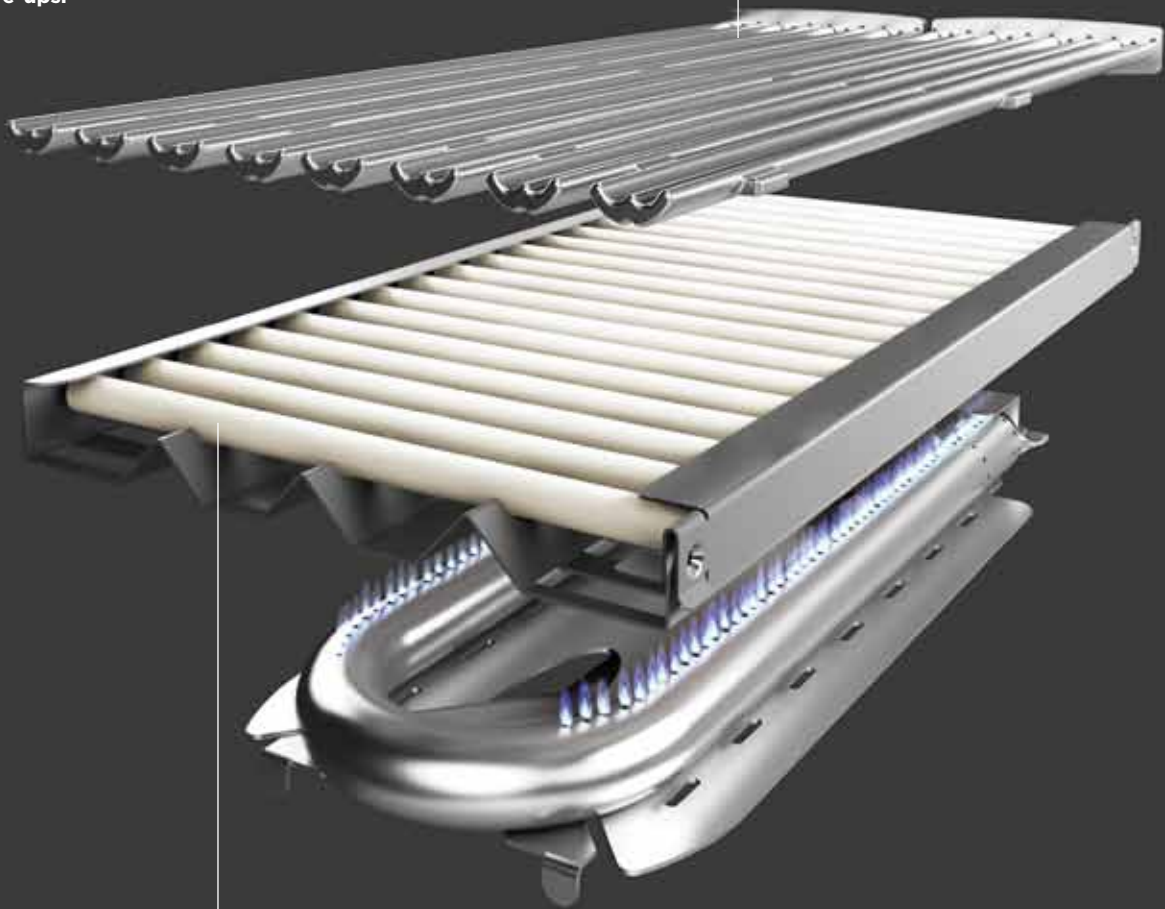

Ceramic Rods

Ceramic Rods reach temperatures of up to 1000°F.

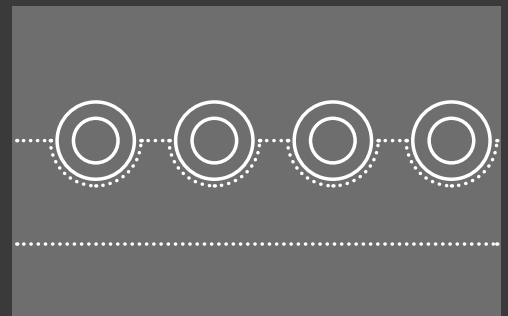

Infrared Hybrid Burner

DCS Grills offer the option of IR Hybrid Burner Technology. The triple-layer system combines a powerful U-Burner, Infrared Emitter and 304 Grade Stainless Steel Round Grates.

The DCS Infrared Emitter transforms convective heat from the burner below, into natural infrared heat which penetrates food without drying it out, maintaining juices and flavors. This infrared system, coupled with the precision of the DCS burners, eliminates the risk of charring food at any temperature, enhancing the perfect heat of the grilling surface.

Widely used by professional chefs, DCS now allows you to have the convenience of Infrared Technology in your own outdoor kitchen.

304 Grade Stainless Steel Round Grates



The grates add intense heat that seals in meat juices for better flavor and perfect sear lines.



Infrared Hybrid Burner

Infrared Hybrid Burner heats up faster with shorter grilling time.



48"

Grill Surface

HEIGHT 24¼"
WIDTH 47⅞" (53¼" INCL. ROTIS. MOTOR)
DEPTH 26½"
SHIPPING WEIGHT 340LBS APPROX.

BGC48-BQAR

48" Grill with Rotisserie

GRILL

Total Cooking Area: 1182sq. in.
 Grill Area: 855sq. in.
 Warming Rack Area: 327sq. in.
 4 x Grill Burners 25,000BTU
 8 x Double-sided Grilling Grates
 Grease Management System™ grease channeling technology

Smart Beam™ Light

ROTISSERIE

1 x Rotisserie Burner 18,000BTU
 Rotisserie Max. Weight: 50lbs

SMOKER

Dedicated Sealed Smoker Tray
 1 x Smoker Burner 3,500BTU

POWER REQUIREMENTS

120V 60Hz

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
 Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



48"

Grill + Side Burner Surfaces

HEIGHT 24¼"
WIDTH 47⅞" (53⅞" INCL. ROTIS. MOTOR)
DEPTH 26½"
SHIPPING WEIGHT 340LBS APPROX.

BGC48-BQR

48" Grill with Rotisserie and Side Burner

GRILL

Total Cooking Area: 1115sq. in.
 Grill Area: 630sq. in.
 Warming Rack Area: 241sq. in.
 3 x Grill Burners 25,000BTU
 6 x Double-sided Grilling Grates
 Grease Management System™ grease channeling technology

Smart Beam™ Light

ROTISSERIE

1 x Rotisserie Burner 14,000BTU
 Rotisserie Max. Weight: 50lbs

SIDE BURNER

Side Burner Area: 244sq. in.
 2 x Integrated Burners 17,000BTU

SMOKER

Dedicated Sealed Smoker Tray
 1 x Smoker Burner 3,500BTU

POWER REQUIREMENTS

120V 60Hz

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
 Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



36"
Grill Surface

HEIGHT 24¼"
WIDTH 35¾" (41¾" INCL. ROTIS. MOTOR)
DEPTH 26½"
SHIPPING WEIGHT 280LBS APPROX.

BGC36-BQAR

36" Grill with Rotisserie

GRILL

Total Cooking Area: 871sq. in.
Grill Area: 630sq. in.
Warming Rack Area: 241sq. in.
3 x Grill Burners 25,000BTU
6 x Double-sided Grilling Grates
Grease Management System™ grease channeling technology
Smart Beam™ Light

ROTISSERIE

1 x Rotisserie Burner 14,000BTU
Rotisserie Max. Weight: 50lbs

SMOKER

Dedicated Sealed Smoker Tray
1 x Smoker Burner 3,500BTU

POWER REQUIREMENTS

120V 60Hz

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



30"
Grill Surface

HEIGHT 24¼"
WIDTH 30" (35¾" INCL. ROTIS. MOTOR)
DEPTH 26½"
SHIPPING WEIGHT 190LBS APPROX.

BGC30-BQR

30" Grill with Rotisserie

GRILL

Total Cooking Area: 748sq. in.
Grill Area: 553sq. in.
Warming Rack Area: 195sq. in.
2 x Grill Burners 25,000BTU
Smart Beam™ Light

ROTISSERIE

1 x Rotisserie Burner 14,000BTU
Rotisserie Max. Weight: 50lbs

POWER REQUIREMENTS

120V 60Hz

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



30"

Grill Surface

HEIGHT 24¼"
WIDTH 30"
DEPTH 26½"
SHIPPING WEIGHT 185LBS APPROX.

BGC30-BQ

30" Grill

GRILL

Total Cooking Area: 748sq. in.

Grill Area: 553sq. in.

Warming Rack Area: 195sq. in.

2 x Grill Burners 25,000BTU


GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.

Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor

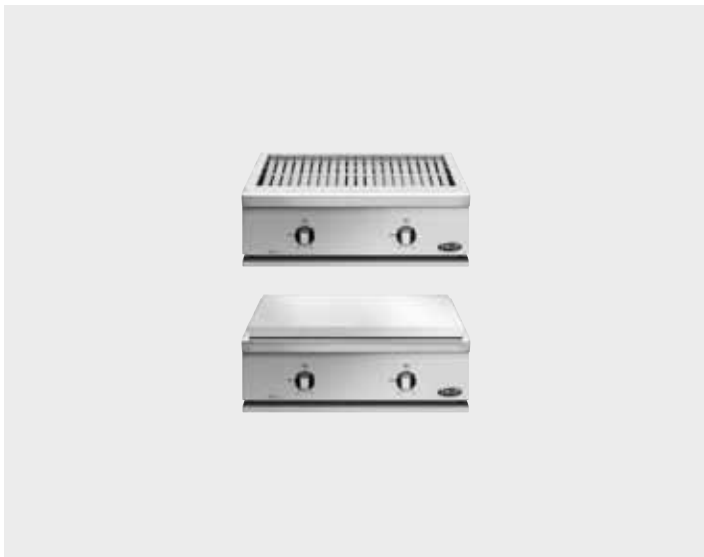

525

Sq. in. Total Cooking Area

HEIGHT 10½" (EXCL. COVERS)
WIDTH 30"
DEPTH 26½"
SHIPPING WEIGHT 130LBS APPROX.

BFGC-30G

30" All-Grill

GRILL

Total Cooking Area: 525sq. in.

Grill Area: 525sq. in.

2 x Grill Burners 25,000BTU

Grease Management System™ grease channeling technology

9V Battery Ignition

Double-Sided Cast 304 Grade Stainless Steel Grilling Grates

Ceramic Radiant Technology

Designer Metal Control Knobs

Removable Stainless Steel Drip Tray

Flat Stainless Steel Cover incl. with Grill

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.

Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



244

Sq. in. Dual Side Burner Area

HEIGHT 10½" (EXCL. COVERS)
WIDTH 30"
DEPTH 26½"
SHIPPING WEIGHT 104LBS APPROX.

BFGC-30BGD

30" Dual Side Burner / Griddle

DUAL SIDE BURNER / GRIDDLE

Dual Side Burner Area: 244sq. in.
2 x 17,000BTU Side Burners
1 x 12,000BTU Griddle Plate
Large 15¾" x 11" Griddle
Flat Stainless Steel Covers incl.
9V Battery Ignition

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



244

Sq. in. Dual Side Burner Area

HEIGHT 10½" (EXCL. COVERS)
WIDTH 30"
DEPTH 26½"
SHIPPING WEIGHT 88LBS APPROX.

BFGC-30BS

30" Dual Side Burner / Sink

DUAL SIDE BURNER / SINK

Dual Side Burner Area: 244sq. in.
2 x 17,000BTU Side Burners
Large 18½" x 11" x 5⅞" Deep Sink
Optional Sink Drain Accessory
Flat Stainless Steel Covers incl.
9V Battery Ignition

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor

Built-in Grills Specifications

GRILLS	BGC48-BQAR	BGC48-BQR	BGC36-BQAR	BGC30-BQR	BGC30-BQ
Overall Height	24¼"	24¼"	24¼"	24¼"	24¼"
Overall Width	47⅞"	47⅞"	35⅞"	30"	30"
Overall Width w/ Rotis. Motor	53¼"	53⅞"	41⅞"	35⅞"	
Overall Depth	26½"	26½"	26½"	26½"	26½"
Cutout Height (proud installation)	10⅞"	10⅞"	10⅞"	10⅞"	10⅞"
Cutout Width (proud installation)	45¾"	45¾"	34½"	28½"	28½"
Cutout Depth (proud installation)	22¾"	22¾"	22¾"	22¾"	22¾"
Total Cooking Area	1182sq. in.	1115sq. in.	871sq. in.	748sq. in.	748sq. in.
Primary Cooking Area (Grill Area)	855sq. in.	630sq. in.	630sq. in.	553sq. in.	553sq. in.
Secondary Cooking (Warming Rack)	327sq. in.	241sq. in.	241sq. in.	195sq. in.	195sq. in.
Side Burner Area		244sq. in.			
25,000BTU Grill Burners	4	3	3	2	2
17,000BTU Integrated Side Burners		2			
18,000BTU Rotisserie Burner	•				
14,000BTU Rotisserie Burner		•	•	•	
Rotisserie Max. Weight	50lbs	50lbs	50lbs	50lbs	
3,500BTU Smoker Burner	•	•	•		
One Step Direct Burner Ignition	•	•	•	•	•
Double Sided Grill Grates	•	•	•		
Grease Management System™	•	•	•		
Natural or LP Gas Options	•	•	•	•	•
Natural Gas Requirements: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4"W.C. Supply Pressure 6" to 9"W.C.	•	•	•	•	•
Propane Gas Requirements: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11"W.C. Supply Pressure 12" to 14"W.C.	•	•	•	•	•
Conversion Kit – Sold Separate	•	•	•	•	•
120V 60Hz Electrical Requirements	•	•	•	•	
304 Grade Stainless Steel	•	•	•	•	•
Approx. Shipping Weight	340lbs	340lbs	280lbs	190lbs	185lbs
Limited 2 Years Parts & Labor	•	•	•	•	•

All-Grill Unit, Dual Side Burner / Griddle Unit and Dual Side Burner / Sink Unit Specifications

GRILLS	BFGC-30G	BFGC-30BGD	BFGC-30BS
Overall Height (excl. covers)	10½"	10½"	10½"
Overall Width	30"	30"	30"
Overall Depth	26⅝"	26⅝"	26⅝"
Cutout Height (proud installation)	10⅞"	10⅞"	10⅞"
Cutout Width (proud installation)	28½"	28½"	28½"
Cutout Depth (proud installation)	22¾"	22¾"	22¾"
Total Cooking Area	525sq. in.		
Side Burner Area		244sq. in.	244sq. in.
25,000BTU Grill Burners	2		
12,000BTU Griddle		1	
17,000BTU Integrated Side Burners		2	2
Double Sided Grill Grates	•		
Stainless Steel Cover incl.	•	•	•
Natural or LP Gas Options	•	•	•
Natural Gas Requirements: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4"W.C. Supply Pressure 6" to 9"W.C.	•	•	•
Propane Gas Requirements: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11"W.C. Supply Pressure 12" to 14"W.C.	•	•	•
Conversion Kit - Sold Separate	•	•	•
Sink Drain Kit - Sold Separate (SNK-DRN)			•
9V Battery Electrical Requirements	•	•	•
304 Grade Stainless Steel	•	•	•
Approx. Shipping Weight	130lbs	104lbs	88lbs
Limited 2 Years Parts & Labor	•	•	•





FREESTANDING GRILLS





Freestanding Grills

DCS Freestanding Grills combine the DCS Grill head unit with a transportable DCS Cart. The versatile DCS Cart comes in a range of sizes to suit your grill head, creating a compact outdoor kitchen solution wherever you chose.

Featuring multiple storage compartments, the cart provides easy access to your condiments, smoker wood chips, serving trays or grill covers. A series of Cart accessories offer maximum flexibility—the LP tank drawer can be converted into a two-bin trash drawer or simply a large capacity storage drawer.

The optional side shelf kits offer a sturdy preparation or resting space, and fold down easily when not in use. Brazilian Cherry wood inserts can be added to the side shelves, creating convenient chopping board surfaces.

Constructed from 304 grade stainless steel, DCS Freestanding Grills are built to last.



Pictured:

36" Grill with Rotisserie: BGC36-BQAR

36" Cart: CAD1-36

2 x Side Shelves: CAD1-SK

2 x Side Shelf Chopping Boards: CAD-WCB

Maple Chopping Board: BGA-MCB (Right)

DCS Grill Accessories Tong: AT-TNG



48"

Grill Surface

HEIGHT 49½"
WIDTH 47⅞" (53¼ INCL. ROTIS. MOTOR)
DEPTH 26½"

BGC48-BQAR + CAD1-48

48" Grill with Rotisserie on 48" CAD Cart

GRILL

Total Cooking Area: 1182sq. in.
 Grill Area: 855sq. in.
 Warming Rack Area: 327sq. in.
 4 x Grill Burners 25,000BTU
 8 x Double-sided Grilling Grates
 Grease Management System™ grease channeling technology

Smart Beam™ Light

ROTISSERIE

1 x Rotisserie Burner 18,000BTU
 Rotisserie Max. Weight: 50lbs

SMOKER

Dedicated Sealed Smoker Tray
 1 x Smoker Burner 3,500BTU

POWER REQUIREMENTS

120V 60Hz

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.

Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

ROTISSERIE

Limited 2 Years Parts & Labor



48"

Grill + Side Burner Surfaces

HEIGHT 49½"
WIDTH 47⅞" (53¼ INCL. ROTIS. MOTOR)
DEPTH 26½"

BGC48-BQR + CAD1-48

48" Grill with Rotisserie and Side Burner on 48" CAD Cart

GRILL

Total Cooking Area: 1115sq. in.
 Grill Area: 630sq. in.
 Warming Rack Area: 241sq. in.
 3 x Grill Burners 25,000BTU
 6 x Double-sided Grilling Grates
 Grease Management System™ grease channeling technology

Smart Beam™ Light

ROTISSERIE

1 x Rotisserie Burner 14,000BTU
 Rotisserie Max. Weight: 50lbs

SIDE BURNER

Side Burner Area: 244sq. in.
 2 x Integrated Burners 17,000BTU

SMOKER

Dedicated Sealed Smoker Tray
 1 x Smoker Burner 3,500BTU

POWER REQUIREMENTS

120V 60Hz

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.

Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



36"

Grill Surface

HEIGHT 49¾"
WIDTH 35¾" (41¾" INCL. ROTIS. MOTOR)
DEPTH 26½"

BGC36-BGAR + CAD1-36

36" Grill with Rotisserie on 36" CAD Cart

GRILL

Total Cooking Area: 871sq. in.
 Grill Area: 630sq. in.
 Warming Rack Area: 241sq. in.
 3 x Grill Burners 25,000BTU
 6 x Double-sided Grilling Grates
 Grease Management System™ grease channeling technology
 Smart Beam™ Light

ROTISSERIE

1 x Rotisserie Burner 14,000BTU
 Rotisserie Max. Weight: 50lbs

SMOKER

Dedicated Sealed Smoker Tray
 1 x Smoker Burner 3,500BTU

POWER REQUIREMENTS

120V 60Hz

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
 Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



30"

Grill Surface

HEIGHT 49¾"
WIDTH 30" (35¾" INCL. ROTIS. MOTOR)
DEPTH 26½"

BGC30-BGR + CAD1-30

30" Grill with Rotisserie on 30" CAD Cart

GRILL

Total Cooking Area: 748sq. in.
 Grill Area: 553sq. in.
 Warming Rack Area: 195sq. in.
 2 x Grill Burners 25,000BTU
 Smart Beam™ Light

ROTISSERIE

1 x Rotisserie Burner 14,000BTU
 Rotisserie Max. Weight: 50lbs

POWER REQUIREMENTS

120V 60Hz

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
 Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



30"

Grill Surface

HEIGHT 50½"
WIDTH 30" (35% INCL. ROTIS. MOTOR)
DEPTH 26½"

BGC30-BQR + BGB30-CSS

30" Grill with Rotisserie on 30" CSS Cart

GRILL

Total Cooking Area: 748sq. in.
 Grill Area: 553sq. in.
 Warming Rack Area: 195sq. in.
 2 x Grill Burners 25,000BTU
 Smart Beam™ Light

ROTISSERIE

1 x Rotisserie Burner 14,000BTU
 Rotisserie Max. Weight: 50lbs

POWER REQUIREMENTS

120V 60Hz

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
 Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



30"

Grill Surface

HEIGHT 49¼"
WIDTH 30"
DEPTH 26½"

BGC30-BQ + CAD1-30

30" Grill on 30" CAD Cart

GRILL

Total Cooking Area: 748sq. in.
 Grill Area: 553sq. in.
 Warming Rack Area: 195sq. in.
 2 x Grill Burners 25,000BTU

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.
 Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor

Freestanding Grill Carts



30"

Grill Surface

HEIGHT 50½"

WIDTH 30"

DEPTH 26½"

BGC30-BQ + BGB30-CSS

30" Grill on 30" CSS Cart

GRILL

Total Cooking Area: 748sq. in.

Grill Area: 553sq. in.

Warming Rack Area: 195sq. in.

2 x Grill Burners 25,000BTU

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.

Propane: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor

Freestanding Grill Carts



4x
Storage
Compartments

HEIGHT 35½"
WIDTH 47¼" (71¼" W/ SIDE SHELF)
DEPTH 25½" (EXCL. HANDLE)
SHIPPING WEIGHT 225LBS APPROX.

CAD1-48

48" Cart

SOLD SEPARATE

Side Shelf Kit (CAD-SK)

OPTIONAL ACCESSORIES

Adjustable Leveling Feet to create a Stationary Cart (CAD-LVL)

Wastebasket Holder for CAD Carts (WBH-ADRICAD)

Tank Drawer Bottom Cover for CAD Carts (TDBC-ADRICAD)

WARRANTY

Limited 2 Years Parts & Labor



3x
Storage
Compartments

HEIGHT 35½"
WIDTH 35¼" (59¼" W/ SIDE SHELF)
DEPTH 25½" (EXCL. HANDLE)
SHIPPING WEIGHT 177LBS APPROX.

CAD1-36

36" Cart

SOLD SEPARATE

Side Shelf Kit (CAD-SK)

OPTIONAL ACCESSORIES

Adjustable Leveling Feet to create a Stationary Cart (CAD-LVL)

Wastebasket Holder for CAD Carts (WBH-ADRICAD)

Tank Drawer Bottom Cover for CAD Carts (TDBC-ADRICAD)

WARRANTY

Limited 2 Years Parts & Labor



2x

Storage
Compartments

HEIGHT 35½"
WIDTH 30" (54" W/ SIDE SHELF)
DEPTH 25½" (EXCL. HANDLE)
SHIPPING WEIGHT 131LBS APPROX.

CAD1-30

30" Cart

SOLD SEPARATE

Side Shelf Kit (CAD-SK)

OPTIONAL ACCESSORIES

Adjustable Leveling Feet to create
a Stationary Cart (CAD-LVL)

Wastebasket Holder for
CAD Carts (WBH-ADRICAD)

Tank Drawer Bottom Cover for
CAD Carts (TDBC-ADRICAD)

WARRANTY

Limited 2 Years Parts & Labor



1x

Storage
Compartment

HEIGHT 35½"
WIDTH 30" (49¼" W/ SIDE SHELF)
DEPTH 25½" (EXCL. HANDLE)
SHIPPING WEIGHT 120LBS APPROX.

BGB30-CSS

30" Cart

INCLUDED

Side Shelf Kit (BGB30-SK)

SOLD SEPARATE

Side Shelf Kit (BGB30-SK)
for additional kit

WARRANTY


Limited 2 Years Parts & Labor

Side Shelves and Back Bar



CAD-SK

Side Shelf for CAD Cart

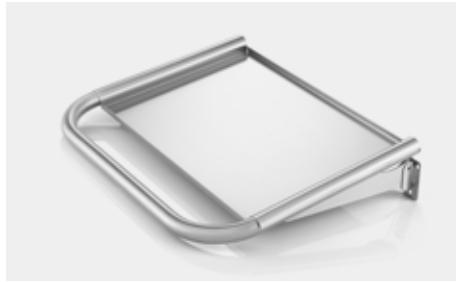

BGB30-SK

Side Shelf for CSS Cart

Side Shelves

Attached to your Freestanding Cart, 24" heavy-duty, stainless steel side shelf kits offer a sturdy expansive workspace that folds down when not in use. Wooden inserts are available in bamboo, Brazilian cherry and maple.



CAD-BB (FOR 30" CAD CART ONLY)

Back Bar

Back Bar

The DCS Back Bar attaches directly to the back of the 30" CAD Cart. Designed to create a more inviting surface for guests to stand at while socializing with the chef, the bar also offers extra serving space. The Brazilian Cherry wood inserts and frames are easily removed when not required.

Freestanding Grills and Grill Carts Specifications

FREESTANDING GRILLS	BGC48-BQAR + CAD1-48	BGC48-BQR + CAD1-48	BGC36-BQAR + CAD1-36	BGC30-BQR + CAD1-30	BGC30-BQR + BGB30-CSS	BGC30-BQ + CAD1-30	BGC30-BQ + BGB30-CSS
Overall Height	49¾"	49¾"	49¾"	49¾"	50½"	49¾"	50½"
Overall Width	48"	48"	36"	30"	30"	30"	30"
Overall Depth	26⅝"	26⅝"	26⅝"	26⅝"	26⅝"	26⅝"	26⅝"
Total Cooking Area	1182sq. in.	1115sq. in.	871sq. in.	748sq. in.	748sq. in.	748sq. in.	748sq. in.
Primary Cooking Area (Grill Area)	855sq. in.	630sq. in.	630sq. in.	553sq. in.	553sq. in.	553sq. in.	553sq. in.
Secondary Cooking (Warming Rack)	327sq. in.	241sq. in.	241sq. in.	195sq. in.	195sq. in.	195sq. in.	195sq. in.
Side Burner Area		244sq. in.					
25,000BTU Grill Burners	4	3	3	2	2	2	2
17,000BTU Integrated Side Burners		2					
One Step Direct Burner Ignition	•	•	•	•	•	•	•
Double Sided Grill Grates	•	•	•				
Side Burner Stainless Steel Cover incl.		•					
Natural or LP Gas Options	•	•	•	•	•	•	•
Natural Gas Requirements: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4"W.C. Supply Pressure 6" to 9"W.C.	•	•	•	•	•	•	•
Propane Gas Requirements: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11"W.C. Supply Pressure 12" to 14"W.C.	•	•	•	•	•	•	•
Conversion Kit - Sold Separate	•	•	•	•	•	•	•
9V Battery Electrical Requirement	•	•	•	•	•	•	•
304 Grade Stainless Steel	•	•	•	•	•	•	•
Approx. Shipping Weight	565lbs	565lbs	457lbs	321lbs	310lbs	316lbs	305lbs
Limited 2 Years Parts & Labor	•	•	•	•	•	•	•

GRILL CARTS	CAD1-48	CAD1-36	CAD1-30	BGB30-CSS
Overall Height	35½"	35½"	35½"	35¾"
Overall Width	47 ¹⁵ / ₁₆ "	35 ¹⁵ / ₁₆ "	30"	30"
Overall Width w/ Side Shelf	71 ¹⁵ / ₁₆ "	59 ¹⁵ / ₁₆ "	54"	49¼"
Overall Depth (excl. Handle)	25½"	25½"	25½"	25½"
Side Shelf Kit - Sold Separate	•	•	•	
Side Shelf Kit - Right Hand incl.				•
304 Grade Stainless Steel	•	•	•	•
Approx. Shipping Weight	225lbs	177lbs	131lbs	120lbs
Limited 2 Years Parts & Labor	•	•	•	•





OUTDOOR KITCHENS



Built-in Outdoor Kitchens

DCS Built-in Products combine to create the ultimate professional outdoor kitchen in your backyard. Designed to make entertaining easier, quick access to your grilling tools, condiments and preparation surfaces means you can spend more time outside with your guests.

Available in numerous sizes, formats and combinations, the DCS Built-in Product range offers flexible layout options to suit any sized space—from compact workstations to expansive U-shaped islands.

DCS Built-in Products are each custom designed and engineered to serve a specific need—the Beverage Chiller is a fully insulated compartment, deep enough to store tall wine bottles; the Trash & Recycle Bin has two removable bins encased in a slide-out drawer for easy emptying; and the Dry Pantry is a completely sealed environment safe from rodents and weather.





Pictured:
24" Outdoor Refrigerator Drawers: RF24DE3
48" Traditional Grill: BGC48-BQAR
48" Access Drawer: ADR2-48
Trash Bin: TB1-25
30" Dual Sideburner/Griddle: BFGC-30BGD
30" Warmer Drawer: WD1-30-SS0D



Pictured:
Tower Drawer Triple: TDT1-20
36" Traditional Grill: BGC36-BQAR
36" Access Drawers: ADR2-36
Dry Pantry: DPl-42
Beverage Chiller: BC-25
Beverage Chiller Accessory: BC-25ACC
Maple Chopping Board: BGA-MCB

Premium Quality Design

Constructed from 304 grade stainless steel DCS Built-in Products are built to last. The neutral stainless steel finish, refined handle profile and consistent detailing ensure DCS Built-in Products will install seamlessly into your desired countertop and cabinetry material palette.



20x

Storage Formats
Available



Flexible Storage Options

DCS Built-in Products are available in numerous sizes, formats and combinations to suit any sized backyard.



Modular Flexibility

DCS Freestanding products can be bolted together in numerous formats and combinations, meaning that there is an ideal Freestanding Outdoor Kitchen for any sized backyard, or to suit any lifestyle.



Custom Designed Storage Units

DCS Built-in Products are designed with specific uses in mind—for example the Beverage Chiller is a fully insulated compartment, deep enough to store tall wine bottles; and the Trash & Recycle Bin has two removable bins encased in a slide out, sealed drawer system.



Ergonomic

The DCS outdoor kitchen is designed to make entertaining easier. Quick access to your grilling tools, condiments and preparation surfaces, allows you to spend more time outside entertaining guests. The soft close tower drawers with full-extension slides are engineered for ease of use.



**Installation Required
LP Models**



Seamless Installation

Designed to seamlessly install into your countertop and cabinetry, the neutral stainless steel finish of the Built-in Product range allows you complete freedom to use your desired material palette.



Ready-to-Use

The self-contained nature of Freestanding Grills and Carts mean installation is simple. Models which run on LP gas do not even require certified technicians to install—buy today, use tonight.



TDT1-20

Tower Drawer Triple



TDD1-20

Tower Drawer Double



TDS1-20

Tower Drawer Single

Tower Drawers

DCS Tower Drawers offer a convenient storage solution. Weather resistant and durable, the drawers are designed to store everything from tools to condiments and serveware. Understanding that outdoor kitchen designs require the same level of functionality as indoor, DCS Tower Drawers can be installed in many configurations.

FEATURES

Commercial quality 304 grade stainless steel
Soft-close drawers with full extension slides
Insulated doors, superior weld and finish

DIMENSIONS

TDT1-20

OVERALL HEIGHT 29¹/₈"

OVERALL WIDTH 20⁵/₁₆"

OVERALL DEPTH 25"

TDD1-20

OVERALL HEIGHT 21¹/₈"

OVERALL WIDTH 20⁵/₁₆"

OVERALL DEPTH 25"

TDS1-20

OVERALL HEIGHT 9¹/₈"

OVERALL WIDTH 20⁵/₁₆"

OVERALL DEPTH 25"



TB1-20

Trash Bin

Trash Bin

The Outdoor Trash & Recycle Bin offers a tidy waste solution which includes two full size removable bins. Creating a fully sealed environment, the drawer system is safe from rodents and weather. The seamless welded 304 grade stainless construction is a perfect complement to any DCS outdoor kitchen.

FEATURES

Includes two 10-gallon removeable bins
Complementing handle design
Commercial quality 304 grade stainless steel
Weather resistant

DIMENSIONS

TB1-20

OVERALL HEIGHT 29¹/₈"

OVERALL WIDTH 20⁵/₁₆"

OVERALL DEPTH 25"



ADR2-48

48" Access Drawer



ADR2-30

30" Access Drawer



ADR2-36

36" Access Drawer



ADR2-24

24" Access Drawer

Access Drawers


DCS Access Drawers offer generous storage for a range of items—from your LP tank to marinating meats. A range of accessories offer maximum flexibility, for example the LP tank drawer can be converted into a two-bin trash drawer or simply a large capacity storage drawer.

FEATURES

- Commercial quality 304 grade stainless steel
- Easy access to a wide range of grilling essentials
- Ice tub access to store cold beverages
- Weather resistant

DIMENSIONS

ADR2-48	ADR2-30
OVERALL HEIGHT 21 $\frac{1}{8}$ "	OVERALL HEIGHT 21 $\frac{1}{8}$ "
OVERALL WIDTH 47 $\frac{1}{8}$ "	OVERALL WIDTH 30"
OVERALL DEPTH 25"	OVERALL DEPTH 25"
ADR2-36	ADR2-24
OVERALL HEIGHT 21 $\frac{1}{8}$ "	OVERALL HEIGHT 21 $\frac{1}{8}$ "
OVERALL WIDTH 35 $\frac{1}{8}$ "	OVERALL WIDTH 24"
OVERALL DEPTH 25"	OVERALL DEPTH 25 $\frac{1}{2}$ "

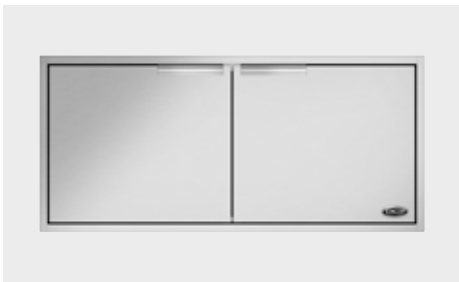

ADN1-20X48

48" Access Door



ADN1-20X30

30" Access Door



ADN1-20X36

36" Access Door



ADN1-20X24

24" Access Door

Access Doors

Designed to fit perfectly under your Built-in Grill, DCS Access Doors are a simple storage solution for grilling essentials. They include a convenient condiment shelf built into the door.

FEATURES

- Commercial quality 304 grade stainless steel
- Easy access to the area underneath the grill
- Weather resistant

DIMENSIONS

ADN1-20X48	ADN1-20X30
OVERALL HEIGHT 21 $\frac{1}{8}$ "	OVERALL HEIGHT 21 $\frac{1}{8}$ "
OVERALL WIDTH 47 $\frac{1}{8}$ "	OVERALL WIDTH 30"
OVERALL DEPTH 6 $\frac{1}{4}$ "	OVERALL DEPTH 6 $\frac{1}{4}$ "
ADN1-20X36	ADN1-20X24
OVERALL HEIGHT 21 $\frac{1}{8}$ "	OVERALL HEIGHT 21 $\frac{1}{8}$ "
OVERALL WIDTH 35 $\frac{1}{8}$ "	OVERALL WIDTH 24"
OVERALL DEPTH 6 $\frac{1}{4}$ "	OVERALL DEPTH 6 $\frac{1}{4}$ "



DP1-42

Dry Pantry

Dry Pantry

A pantry is central to any kitchen design. The DCS Dry Pantry offers a consistent, professional design with adjustable storage features, helping to create a truly cohesive and functional outdoor kitchen.

FEATURES

- Adjustable racks and removable drawer inserts
- Complete sealed gasket
- Dry environment safe from rodents and weather
- Commercial quality 304 grade stainless steel

DIMENSIONS

DP1-42

OVERALL HEIGHT 30½"


OVERALL WIDTH 42"

OVERALL DEPTH 25¼"




RF24T1

24" Outdoor Beer Dispenser

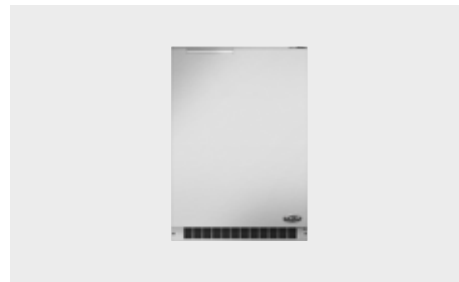


RF24RE3

24" Outdoor Refrigerator

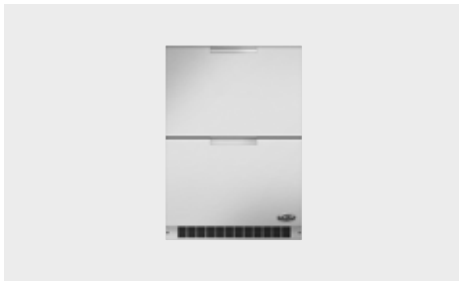

RF24DE3

Outdoor Refrigerated Drawers

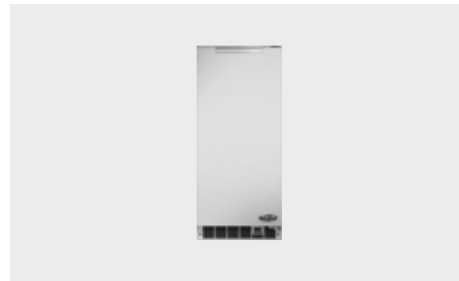

RF15I1

Outdoor Ice Maker

Outdoor Refrigerators

FEATURES: 24" OUTDOOR BEER DISPENSER

- Holds ½ or ¼ keg of beer
- Includes tower assembly and handle, hoses, regulator, CO₂ tank, drip tray

FEATURES: 24" OUTDOOR REFRIGERATOR

- 6.1 cuft Capacity, Interior Lighting, Auto Defrost

FEATURES: OUTDOOR REFRIGERATED DRAWERS

- Hygienic stainless steel drawer interiors
- Holiday mode

FEATURES: OUTDOOR ICE MAKER

- Produces and stores up to 35lbs of ice per day
- Certified for outdoor use from 55-90°F

DIMENSIONS

RF24T1

OVERALL HEIGHT 49¼"

OVERALL WIDTH 23¾"

OVERALL DEPTH 24¾"

RF24DE3

OVERALL HEIGHT 34"

OVERALL WIDTH 23¾"

OVERALL DEPTH 24¾"

RF24RE3

OVERALL HEIGHT 34"

OVERALL WIDTH 23¾"

OVERALL DEPTH 24¾"

RF15I1

OVERALL HEIGHT 34"

OVERALL WIDTH 14¾"

OVERALL DEPTH 23¾"



BC25

Beverage Chiller



BC-BOTTLEAC-25

Beverage Chiller Accessory

Beverage Chiller & Accessory

An ultimate entertainer's feature, the 25" DCS Beverage Chiller is a deep, fully insulated compartment that can hold up to 17 gallons of ice to chill your refreshments. The Accessory, designed to house 1-litre bottles, can be installed at the front of your Beverage Chiller, freeing it up to be used as an outdoor sink.

FEATURES: BEVERAGE CHILLER

Commercial quality 304 grade stainless steel
Insulated double walled professional construction
Can be plumbed to convert to outdoor 25" sink

FEATURES: BEVERAGE CHILLER ACCESSORY

Removable and easy-clean base pan
Discreet under-bar outdoor towel holder

DIMENSIONS

BC25	BC-BOTTLEAC-25
OVERALL HEIGHT 10 ³ / ₈ "	OVERALL HEIGHT 10 ³ / ₈ "
OVERALL WIDTH 25 ¹ / ₈ "	OVERALL WIDTH 25 ¹ / ₈ "
OVERALL DEPTH 21 ¹ / ₈ "	OVERALL DEPTH 6 ⁵ / ₈ "



BGC132, BGC132-BI

Professional Double Side Burner



BGC131, BGC131-BI

Professional Single Side Burner

Professional Sealed Side Burners

The dedicated DCS Side Burners allow separate cooking activities to take place alongside the grill. Constructed of heavy stainless steel, DCS side burners are rated at a powerful 17,000BTUs, and are available in single or double burner configurations.

FEATURES

Stainless steel grate cover included
Design detailing is consistent with DCS Grills
Available for Built-in and 30" Cart installations

DIMENSIONS

BGC132	BGC131
OVERALL HEIGHT 10 ³ / ₈ "	OVERALL HEIGHT 10 ³ / ₈ "
OVERALL WIDTH 13"	OVERALL WIDTH 13"
OVERALL DEPTH 26 ³ / ₈ "	OVERALL DEPTH 26 ³ / ₈ "
BGC132-BI	BGC131-BI
OVERALL HEIGHT 10 ³ / ₈ "	OVERALL HEIGHT 10 ³ / ₈ "
OVERALL WIDTH 14 ¹ / ₈ "	OVERALL WIDTH 14 ¹ / ₈ "
OVERALL DEPTH 26 ³ / ₈ "	OVERALL DEPTH 16 ¹ / ₈ "



WD130-SSOD

30" Outdoor Warming Drawer

Outdoor Warming Drawer

The DCS Outdoor Warming Drawer means dinner is ready when you are. The thermostatically controlled temperature ranges from 175°-230°F, and removable stainless steel shelf means there is enough space for up to 6 standard-sized dinner plates.


FEATURES

- Temperature range from 175°-230°F
- Removable stainless steel shelf/serving tray
- Outdoor UL approval

DIMENSIONS

WD130-SSOD

- OVERALL HEIGHT** 16"
- OVERALL WIDTH** 30"
- OVERALL DEPTH** 26½"

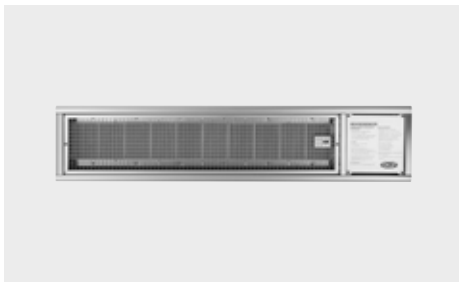

DRH48N

Built-in Patio Heater



DRHRMT

Remote Control

Built-in Patio Heater & Remote Control

DCS has applied its long history of producing commercial-grade heating to a solution for the outdoor kitchen at home. The DCS Built-in Patio Heater features 56,000BTU of comfortable heat up to 15 feet away, extending the season for entertaining outdoors.


FEATURES

- Mounts easily to eaves
- Includes extension mounting kit
- Available for natural gas only
- Remote Control Accessory available

DIMENSIONS

DRH48N	DRHRMT
OVERALL HEIGHT 10¼"	OVERALL HEIGHT 10¼"
OVERALL WIDTH 48"	OVERALL WIDTH 8½"
OVERALL DEPTH 7¾"	OVERALL DEPTH 4"

Insulated Jackets

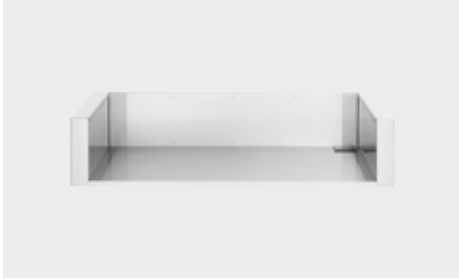

BGA48-IJS

48" Insulated Jacket



BGB30-IJS

30" Insulated Jacket



BGA36-IJS

36" Insulated Jacket

Insulated Jackets

Mandatory for Grills installed in islands with combustible materials. Please see installation Information for further clarification on the definition of combustible materials.

FEATURES

For use with 30", 36", 48" Built-in Grills and 30" Built-in Burners

Professional, all welded stainless steel

DIMENSIONS

BGA48-IJS

OVERALL HEIGHT 11 $\frac{1}{2}$ "

OVERALL WIDTH 51 $\frac{1}{2}$ "

OVERALL DEPTH 23 $\frac{3}{4}$ "

BGB30-IJS

OVERALL HEIGHT 11 $\frac{1}{2}$ "

OVERALL WIDTH 34 $\frac{3}{8}$ "

OVERALL DEPTH 23 $\frac{3}{4}$ "

BGA36-IJS

OVERALL HEIGHT 11 $\frac{1}{2}$ "

OVERALL WIDTH 40 $\frac{3}{8}$ "

OVERALL DEPTH 23 $\frac{3}{4}$ "

Tower Drawers Specifications

TOWER DRAWERS	TD1-20	TDD1-20	TDS1-20
Overall Height	29 $\frac{1}{8}$ "	21 $\frac{1}{8}$ "	9 $\frac{5}{8}$ "
Overall Width	20 $\frac{5}{16}$ "	20 $\frac{5}{16}$ "	20 $\frac{5}{16}$ "
Overall Depth (excl. handle)	25"	25"	25"
Width of Chassis	18 $\frac{1}{2}$ "	18 $\frac{1}{2}$ "	18 $\frac{1}{2}$ "
Internal Drawer Height (top drawer)	5"	5"	5"
Internal Drawer Height (middle drawer)	5"		
Internal Drawer Height (bottom drawer)	8"	8"	
Internal Drawer Width (all drawers)	15 $\frac{5}{16}$ "	15 $\frac{5}{16}$ "	15 $\frac{5}{16}$ "
Internal Drawer Depth (all drawers)	21 $\frac{1}{2}$ "	21 $\frac{1}{2}$ "	21 $\frac{1}{2}$ "
Internal Drawer Rating	75lbs	75lbs	75lbs
Weather Resistant	•	•	•
304 Grade Stainless Steel	•	•	•
Approx. Shipping Weight	90lbs	80lbs	38lbs
Limited 2 Years Parts & Labor	•	•	•
INSTALLATION			
Depth of Chassis (proud installation)	23"	23"	23"
Cutout Height (proud installation)	28"	20 $\frac{11}{16}$ "	8 $\frac{7}{16}$ "
Cutout Width (proud installation)	18 $\frac{7}{8}$ "	18 $\frac{7}{8}$ "	18 $\frac{7}{16}$ "
Cutout Depth (proud installation)	24" min.	24" min.	24" min.
Cutout Height (flush installation)	29 $\frac{5}{16}$ "	22 $\frac{1}{16}$ "	9 $\frac{13}{16}$ "
Cutout Width (flush installation)	20 $\frac{1}{2}$ "	20 $\frac{1}{2}$ "	20 $\frac{1}{2}$ "
Cutout Depth (flush installation)	26" min.	26" min.	26" min.

Trash Bin Specifications

TRASH BIN	TB1-20
Overall Height	29 $\frac{1}{8}$ "
Overall Width	20 $\frac{5}{16}$ "
Overall Depth (excl. handle)	25"
Width of Chassis	18 $\frac{1}{2}$ "
Trash Bins incl.	2
Trash Bin Size	10gal
Built-in Installation	•
Weather Resistant	•
304 Grade Stainless Steel	•
Approx. Shipping Weight	68lbs
Limited 2 Years Parts & Labor	•
INSTALLATION	
Depth of Chassis (proud installation)	23"
Cutout Height (proud installation)	28"
Cutout Width (proud installation)	18 $\frac{7}{8}$ "
Cutout Depth (proud installation)	24" min.
Cutout Height (flush installation)	29 $\frac{1}{16}$ "
Cutout Width (flush installation)	20 $\frac{1}{2}$ "
Cutout Depth (flush installation)	26" min.

Access Drawers and Access Doors Specifications

ACCESS DRAWERS	ADR2-48	ADR2-36	ADR2-30	ADR2-24
Overall Height	21 ⁷ / ₈ "	21 ⁷ / ₈ "	21 ⁷ / ₈ "	21 ⁷ / ₈ "
Overall Width	47 ¹⁵ / ₁₆ "	35 ¹⁵ / ₁₆ "	30"	24"
Overall Depth (excl. handle)	25 ¹ / ₂ "	25 ¹ / ₂ "	25 ¹ / ₂ "	25 ¹ / ₂ "
Weather Resistant	•	•	•	•
304 Grade Stainless Steel	•	•	•	•
Approx. Shipping Weight	147lbs	108lbs	78lbs	69lbs
Limited 2 Years Parts & Labor	•	•	•	•
INSTALLATION				
Depth of Chassis (proud installation)	23 ¹ / ₂ "	23 ¹ / ₂ "	23 ¹ / ₂ "	23 ¹ / ₂ "
Cutout Height (proud installation)	20"	20"	20"	20"
Cutout Width (proud installation)	48 ³ / ₁₆ "	36 ³ / ₁₆ "	30 ³ / ₁₆ "	24 ³ / ₁₆ "
Cabinet Depth (proud installation)	24" min.	24" min.	24" min.	24" min.
Cutout Height (flush installation)	23 ¹¹ / ₁₆ "	23 ¹¹ / ₁₆ "	23 ¹¹ / ₁₆ "	23 ¹¹ / ₁₆ "
Cutout Width (flush installation)	48 ³ / ₁₆ "	36 ³ / ₁₆ "	30 ³ / ₁₆ "	24 ³ / ₁₆ "
Cabinet Depth (flush installation)	26" min.	26" min.	26" min.	26" min.

ACCESS DOORS	ADN1-20X48	ADN1-20X36	ADN1-20X30	ADN1-20X24
Overall Height	21 ⁷ / ₈ "	21 ⁷ / ₈ "	21 ⁷ / ₈ "	21 ⁷ / ₈ "
Overall Width	47 ¹⁵ / ₁₆ "	35 ¹⁵ / ₁₆ "	30"	24"
Overall Depth (excl. handle)	6 ¹ / ₄ "	6 ¹ / ₄ "	6 ¹ / ₄ "	6 ¹ / ₄ "
Depth from Face of Cabinet	4 ¹ / ₄ "	4 ¹ / ₄ "	4 ¹ / ₄ "	4 ¹ / ₄ "
Weather Resistant	•	•	•	•
304 Grade Stainless Steel	•	•	•	•
Approx. Shipping Weight	39lbs	32lbs	28lbs	22lbs
Limited 2 Years Parts & Labor	•	•	•	•
INSTALLATION				
Cutout Height (proud installation)	20"	20"	20"	20"
Cutout Width (proud installation)	46"	34"	28"	22"
Cutout Height (flush installation)	22 ¹ / ₁₆ "	22 ¹ / ₁₆ "	22 ¹ / ₁₆ "	22 ¹ / ₁₆ "
Cutout Width (flush installation)	48 ³ / ₁₆ "	36 ³ / ₁₆ "	30 ³ / ₁₆ "	24 ³ / ₁₆ "

Dry Pantry Specification

DRY PANTRY	DP1-42
Overall Height	30½"
Overall Width	42"
Overall Depth (excl. handles)	25 ¹¹ / ₁₆ "
Width of Chassis	40"
Storage Drawer Height	3 ¹¹ / ₁₆ "
Storage Drawer Width	11 ⁷ / ₈ "
Storage Drawer Depth	19 ³ / ₈ "
Wire Shelf Width (all)	19 ⁷ / ₈ "
Wire Shelf Depth (all)	21 ⁷ / ₈ "
Storage Capacity LH	5cuft
Storage Capacity RH	7cuft
Storage Bin Height	4"
Removable Storage Bins	3
Heavy Gauge Wire Shelves	2
Shelf Positions	3
Built-in Installation	•
Weather Resistant	•
304 Grade Stainless Steel	•
Approx. Shipping Weight	190lbs
Limited 2 Years Parts & Labor	•
INSTALLATION	
Depth of Chassis (proud installation)	23 ¹¹ / ₁₆ "
Cutout Height (proud installation)	29 ³ / ₁₆ "
Cutout Width (proud installation)	40 ⁷ / ₁₆ "
Cutout Depth (proud installation)	24 ¹¹ / ₁₆ " min.
Cutout Height (built-in)	30 ¹¹ / ₁₆ "
Cutout Height (slide-in with kickstrip)	33½"
Cutout Width (built-in)	42 ³ / ₁₆ "

Outdoor Refrigeration Specifications

OUTDOOR REFRIGERATION	RF24T1	RF24RE3	RF24DE3	RF1511
Overall Height (to top unit)	34"	34"	34"	34"
Overall Height (to top of tap handle)	49¼"			
Overall Width	23⅞"	23⅞"	23⅞"	14⅞"
Overall Depth (excl. handle)	24⅞"	24⅞"	24⅞"	23⅞"
Cutout Height	34½"	34½"	34½"	34½"
Cutout Width	24¼" min.	24¼" min.	24¼" min.	15¼" min.
Cutout Depth	24" min.	24" min.	24" min.	24" min.
Interior Space/Capacity	½ or ¼ keg	6.1cuft	5.6cuft	Up to 35lbs ice per day
Built-in or Freestanding	•	•	•	•
Energy Star	•	•	•	
Caster Kit - Sold Separate	•	•	•	•
Electrical Requirements	120V 60Hz	120V 60Hz	120V 60Hz	120V 60Hz
Weather Resistant	•	•	•	•
304 Grade Stainless Steel	•	•	•	•
Approx. Shipping Weight	136lbs	124lbs	174lbs	106lbs
Limited 2 Years Parts & Labor	•	•	•	•

Warming Drawer Specifications

WARMING DRAWER	WD1-30-SSOD
Overall Height	16"
Overall Width	30"
Overall Depth (excl. handle)	26 $\frac{1}{8}$ "
Depth of Chassis	24 $\frac{1}{8}$ "
Drawer Space	1.6cuft
Built-in Installation	•
Removable Shelf / Serving Tray	•
Electrical Requirements	120V 60Hz
Weather Resistant	•
304 Grade Stainless Steel	•
Approx. Shipping Weight	93lbs
Limited 2 Years Parts & Labor	•
INSTALLATION	
Cutout Height (proud installation)	14 $\frac{7}{16}$ "
Cutout Width (proud installation)	28 $\frac{3}{8}$ "
Cutout Depth (proud installation)	24 $\frac{3}{16}$ "
Cutout Height (flush installation)	16 $\frac{3}{16}$ "
Cutout Width (flush installation)	30 $\frac{3}{16}$ "
Cutout Depth (flush installation)	26 $\frac{3}{16}$ "

Beverage Chiller & Accessory and Patio Heater Specifications

BEVERAGE CHILLER & ACCESSORY	BC25	BC-BOTTLE AC-25
Overall Height (incl. lid)	10 ³ / ₈ "	10 ³ / ₈ "
Overall Width (incl. lid)	25 ¹ / ₁₆ "	25 ¹ / ₁₆ "
Overall Depth (incl. lid)	21 ¹⁵ / ₁₆ "	6 ⁵ / ₈ "
Height of Chassis	9 ³ / ₁₆ "	
Capacity	17gal	1L-Bottles
Condiment Storage Containers	4	
Built-in Installation	•	•
Weather Resistant	•	•
304 Grade Stainless Steel	•	•
Approx. Shipping Weight	62lbs	13lbs
Limited 2 Years Parts & Labor	•	•
INSTALLATION		
Cutout Width (proud installation)	24 ³ / ₁₆ "	24 ³ / ₁₆ "
Cutout Depth (proud installation)	21 ¹ / ₁₆ "	
Cutout Height with Bottle Holder		9 ⁷ / ₈ "
Cutout Depth with Bottle Holder		21 ¹¹ / ₁₆ "

PATIO HEATER	DRH48N
Overall Height	10 ¹ / ₄ "
Overall Width	48"
Overall Depth	7 ³ / ₄ "
BTU Rating	56,000BTU
Gas Requirements:	•
Max. Pressure: ½ psig, Min. Pressure:	
6"W.C. Manifold Pressure: 5"W.C.	
Internal 5"W.C. Regulator	
Electrical Requirements	120V 60Hz
Optional Remote Control (DRH-RMT)	•
Weather Resistant	•
304 Grade Stainless Steel	•
Approx. Shipping Weight	55lb
Limited 2 Years Parts & Labor	•

Insulated Jackets Specifications

INSULATED JACKETS	BGA48-IJS	BGA36-IJS	BGB30-IJS
Overall Height	11½"	11½"	11½"
Overall Width	51½"	40¾"	34¾"
Overall Depth	23¾"	23¾"	23¾"
Cutout Height	11½"	11½"	11½"
Cutout Width	51½"	40½"	34¾"
Cutout Depth	23¾"	23¾"	23¾"
Weather Resistant	•	•	•
304 Grade Stainless Steel	•	•	•
Approx. Shipping Weight	106lb	75lb	53lb
Limited 2 Years Parts & Labor	•	•	•

PROFESSIONAL SIDE BURNERS	BGC132	BGC132-BI	BGC131	BGC131-BI
Overall Height	10⅝"	10⅝"	10⅝"	10⅝"
Overall Width	13"	14¼"	13"	14¼"
Overall Depth	26¾"	26⅝"	15¾"	16¼"
Cutout Height		10⅞" min.		10⅞" min.
Cutout Width		12⅞"		12⅞"
Cutout Depth		23¾"		23¾"
Built-in Installation		•		•
17,000BTU Side Burners	2	2	1	1
Stainless Steel Cover incl.	•	•	•	•
Natural or LP Gas Options	•	•	•	•
Natural Gas Requirements: ½" NPT male with a ⅜" flare adapter. Operational Pressure 4"W.C. Supply Pressure 6" to 9"W.C.	•	•	•	•
Propane Gas Requirements: ½" NPT male with a ⅜" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11"W.C. Supply Pressure 12" to 14"W.C.	•	•	•	•
Electrical Requirements: 1.5V Battery for Ignition	•	•	•	•
304 Grade Stainless Steel	•	•	•	•
Approx. Shipping Weight	46lbs	46lbs	32lbs	32lbs
Limited 2 Years Parts & Labor	•	•	•	•



Pictured:

Dual Side Burner/Sink: BFGC-30BGD

All-Grill: BFGC-30G

Dual Side Burner/Griddle: BFGC-30BGD

3 x 30" Grill Cart: CAD1-30

3 x Back Bar: CAD-BB

2 x Side Shelves: CAD1-SK

2 x Side Shelf Chopping Boards: CAD-WCB

Maple Chopping Board: BGA-MCB

DCS Grill Accessories Tong: AT-TNG

Freestanding Outdoor Kitchens

DCS Freestanding Outdoor products offer a complete outdoor kitchen solution in an adjustable modular format. A wide range of grilling, sink, storage and refrigeration products can be bolted together in numerous formats and combinations to create the ideal Freestanding Outdoor Kitchen for your backyard.

An alternative solution to the Built-in Kitchen, a DCS Freestanding Outdoor Kitchen can grow and evolve as your lifestyle or environment changes. The self-contained nature of Freestanding Grills and Carts mean installation is simple. Models which run on LP gas do not even require certified technicians to install—buy today, use tonight.

Constructed from 304 grade stainless steel, and designed to meet the needs of the most demanding chefs, DCS Freestanding Outdoor Kitchens are built to last.



Pictured:
2 x Side Shelves: CAD1-SK
2 x Side Shelf Chopping Board: CAD-WCB
Maple Chopping Board: BGA-MCB
Refrigerator Drawer - Wrapper: WR24RTD
Refrigerator Drawer - Solid Surface: WRT24RD
24" Outdoor Refrigerator Drawers: RF24DE3
30" Traditional Grill: B6C30-BQR
30" Grill Cart: CAD1-30
Bend Unit: CAD-BND



Adjustable Format

Bend Units can be positioned between Grill, Burner or Refrigeration stations, giving you the freedom to design a Freestanding Outdoor Kitchen to fit your space. They allow you to position your kitchen in the best situation for seasonal weather, maximizing year-round use. Ideal around a pool or in a courtyard corner, two Bend Units will turn a straight line-up into a 90° corner format.



Pictured:
Bend Unit Solid Surface: CAD-BNDT
Dual Side Burner/Griddle: BF6C-30BGD
30" Grill Cart: CAD1-30
Bend Unit: CAD-BND
Bend Unit Solid Surface: CAD-BNDT
24" Outdoor Beer Dispenser: RF24T1
Beer Dispenser Wrapper: WR24RTD
Beer Dispenser Solid Surface: WRT24T
Mug Rail: UMR





All-Grill Unit and Dual Side Burner / Griddle Unit



525

Sq. in. Total
Cooking Area

HEIGHT 10½" (EXCL. COVERS)

WIDTH 30"

DEPTH 26¾"

SHIPPING WEIGHT 130LBS APPROX.

BFGC-30G + CAD1-30

30" All-Grill

GRILL

Total Cooking Area: 525sq. in.

Grill Area: 525sq. in.

2 x Grill Burners 25,000BTU

Grease Management System™
grease channeling technology

9V Battery Ignition

Double-Sided Cast 304 Grade
Stainless Steel Grilling Grates

Ceramic Radiant Technology

Designer Metal Control Knobs

Removable Stainless Steel Drip Tray

Flat Stainless Steel Cover
incl. with grill

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜"
flare adapter. Operational Pressure 4"
W.C. Supply Pressure 6" to 9" W.C.

Propane: ½" NPT male with a ⅜"
flare adapter. LP hose with regulator
and Type 1 connector is shipped
connected. Operational Pressure 11"
W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



244

Sq. in. Dual Side
Burner Area

HEIGHT 10½" (EXCL. COVERS)

WIDTH 30"

DEPTH 26¾"

SHIPPING WEIGHT 104LBS APPROX.

BFGC-30BGD + CAD1-30

30" Dual Side Burner / Griddle

DUAL SIDE BURNER / GRIDDLE

Dual Side Burner Area: 244sq. in.

2 x 17,000BTU Side Burners

1 x 12,000BTU Griddle Plate

Large 15¼" x 11" Griddle

Flat Stainless Steel Covers incl.

9V Battery Ignition

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ⅜"
flare adapter. Operational Pressure 4"
W.C. Supply Pressure 6" to 9" W.C.

Propane: ½" NPT male with a ⅜"
flare adapter. LP hose with regulator
and Type 1 connector is shipped
connected. Operational Pressure 11"
W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor

Dual Side Burner / Sink Unit



244

Sq. in. Dual Side
Burner Area

HEIGHT 10½" (EXCL. COVERS)

WIDTH 30"

DEPTH 26¾"

SHIPPING WEIGHT 88LBS APPROX.

BFGC-30BS + CAD1-30

30" Dual Side Burner / Sink

DUAL SIDE BURNER / SINK

Dual Side Burner Area: 244sq. in.

2 x 17,000BTU Side Burners

Large 18½" x 11" x 5¾" Deep Sink

Optional Sink Drain Accessory

Flat Stainless Steel Covers incl.

9V Battery Ignition

GAS REQUIREMENTS

Natural Gas: ½" NPT male with a ¾" flare adapter. Operational Pressure 4" W.C. Supply Pressure 6" to 9" W.C.

Propane: ½" NPT male with a ¾" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11" W.C. Supply Pressure 12" to 14" W.C.

WARRANTY

Limited 2 Years Parts & Labor



CAD-BND

Bend Unit



CAD-BNDT

Bend Unit Solid Surface

Bend Unit

Bend Units offer the flexibility to design your Freestanding Outdoor Kitchen to fit your space. Ideal if space is minimal, two Bend Units will turn a straight line-up into a 90° corner format. The Bend Unit Solid Surface can be bought separately, otherwise specifications are included for a customized surface to match your countertop.



BND-CNR

Bracket (Holds Corner Solid Surface)



BND-CNRT

Corner Solid Surface

Corner

Create extra counter space for your Freestanding Outdoor Kitchen with the Corner Bracket and Solid Surface. The Corner Solid Surface can be bought separately, otherwise specifications are included for a customized surface to match your countertop. Rated to hold 200lbs.



WR24RTD

Wrapper for Refrigerator, Tap, Drawers



WRT24RD (SHOWN), WRT24T (FOR TAP)

Solid Surface for Refrigerator, Tap, Drawers

Wrapper & Solid Surfaces Outdoor Refrigeration

Integrate the DCS Outdoor Refrigerator, Refrigerated Drawers or Beer Dispenser with the rest of your Freestanding Outdoor Kitchen with a DCS Wrapper. This creates additional preparation and serving space. The Wrapper Solid Surface can be bought separately, otherwise specifications are included for a customized surface to match your countertop.



WR151

Wrapper for Ice Maker



WRT151

Solid Surface for Ice Maker

Wrapper & Solid Surface Ice Maker

Integrate the DCS Ice Maker with the rest of your Freestanding Outdoor Kitchen with a DCS Wrapper. This creates additional preparation and serving space. The Wrapper Solid Surface can be bought separately, otherwise specifications are included for a customized surface to match your countertop.

All-Grill Unit, Dual Side Burner / Griddle Unit and Dual Side Burer / Sink Unit Specifications

GRILLS + CART	BFGC-30G	BFGC-30BGD	BFGC-30BS	CAD1-30
Overall Height (excl. covers)	10½"	10½"	10½"	35½"
Overall Width	30"	30"	30"	47 ¹⁵ / ₁₆ "
Overall Width w/ Side Shelf				71 ¹⁵ / ₁₆ "
Overall Depth (excl. handle)	26 ⁵ / ₈ "	26 ⁵ / ₈ "	26 ⁵ / ₈ "	25½"
Cutout Height	10½"	10½"	10½"	
Cutout Width	45 ³ / ₄ "	45 ³ / ₄ "	34½"	
Cutout Depth	22 ³ / ₄ "	22 ³ / ₄ "	22 ³ / ₄ "	
Total Cooking Area	525sq. in.			
Side Burner Area		244sq. in.	244sq. in.	
25,000BTU Grill Burners	2			
12,000BTU Griddle		1		
17,000BTU Integrated Side Burners		2	2	
Double Sided Grill Grates	•			
Stainless Steel Cover incl.	•	•	•	
Natural or LP Gas Options	•	•	•	
Natural Gas Requirements: ½" NPT male with a ¾" flare adapter. Operational Pressure 4"W.C. Supply Pressure 6" to 9"W.C.	•	•	•	
Propane Gas Requirements: ½" NPT male with a ¾" flare adapter. LP hose with regulator and Type 1 connector is shipped connected. Operational Pressure 11"W.C. Supply Pressure 12" to 14"W.C.	•	•	•	
Conversion Kit - Sold Separate	•	•	•	
Sink Drain Kit - Sold Separate (SNK-DRN)			•	
9V Battery Electrical Requirements	•	•	•	
Side Shelf Kit - Sold Separate				•
Leveling Legs - Sold Separate				•
Weather Resistant	•	•	•	•
304 Grade Stainless Steel	•	•	•	•
Approx. Shipping Weight	130lbs	104lbs	88lbs	225lbs
Limited 2 Years Parts & Labor	•	•	•	•





ACCESSORIES



Accessories



AA-PAHS

DCS Apron—Hickory Stripe

A necessity for any serious griller, this DCS apron is generously sized and features a front storage pocket and adjustable neck band. Made in America from 100% Vintage Cotton Hickory Stripe and hand-finished with brass findings.



AA-PADB

DCS Apron—Duck Brown


A necessity for any serious griller, this DCS apron is generously sized and features a front storage pocket and adjustable neck band. Made from 100% Vintage Cotton Duck Brown and hand-finished with brass findings.



AT-TNG, AT-CB, AT-GMT, AT-SPT SETS: ATS-CK3, ATS-CKL3

Grilling Tools


Made specifically for use with your DCS Grill, these tools are a necessity in any serious griller's kit. Hand crafted from stainless steel, with walnut handles and brass rivets. Available as singles or in select combinations.

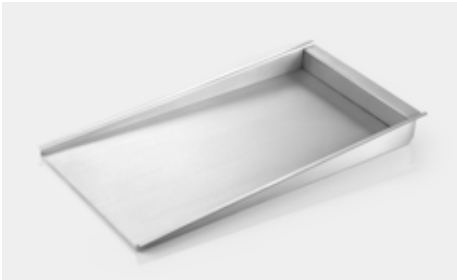

BGC-GP

Grill Griddle Plate


Made of commercial quality plated stainless steel that insures a level cooking surface and even heat distribution, the DCS Grill Griddle Plate allows you to cook delicate items on your Grill with ease.

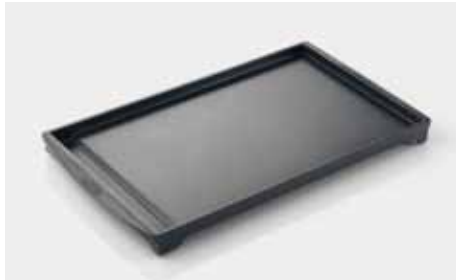

CTGP

Side Burner Griddle Plate

Designed to be used on your Professional Double Side Burner, this Griddle Plate allows you to cook delicate items that are not usually cooked outside, with ease.

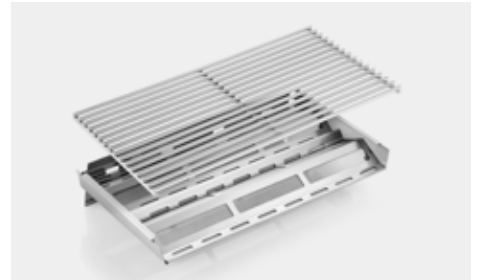

BGC-IR

Hybrid Infrared Burner

The Hybrid Infrared Burner can be used in addition to the intense searing heat of the gas grill. This means an even faster response to heating time and an even more precise turn down control creating a more Perfect Sear.



AP-CBB

Bamboo Side Shelf Insert

Designed to convert your CAD Cart Side Shelves into convenient chopping board surfaces. These inserts are crafted from solid bamboo.



CAD-WCB

Brazilian Cherry Side Shelf Insert

Designed to convert your CAD cart side shelves into convenient chopping board surfaces. These inserts are crafted from solid Brazilian cherry wood.



BGA-MCB

Maple Side Shelf Insert

Designed to convert your 30" CSS Cart Side Shelves into convenient chopping board surfaces. These inserts are crafted from solid Maple wood.

Accessories



CAD-LVL

Leveling Legs for CAD Carts

The Leveling Legs turn your Freestanding Kitchen into a stationary kitchen.



UC

Caster Kit for Outdoor Refrigeration

For use with any Outdoor Refrigeration Units.



UMR

Mug Rail

The Mug Rail can be added to your 24" Outdoor Beer Dispenser to assist in mug storage and complete a polished design.



TDBC-ADRICAD

Tank Drawer (Bottom Cover)

For use with your Access Drawers or CAD Carts. The Tank Drawer bottom cover can convert your propane drawer into a deep storage drawer or a trash bin when used in conjunction with the Waste Basket Holder.



WBH-ADRICAD

Waste Basket Holder

In conjunction with the Tank Drawer bottom cover, you can convert your LP Tank Drawer into a convenient trash / recycle drawer. Bins are included with kit. For use with your Access Drawers or CAD Carts.



SNKDRN

Sink Drain Assembly Kit

For use with liberty model BFG-30BS as an option.



RFIDP

Ice Maker Drain Pump

For use with the RF151 Ice Maker if gravity drain cannot be utilized.



BLUICE

Ice Pack

This cold-assist Ice Pack fits snugly into the Access Drawers and CAD Carts.



QDHKM

Quick Disconnect Hose

Includes 12" flexible gas hose, 1/2" male quick-disconnect on one end and 1/2" female flare swivel on the other. CSA certified for Natural or LP gas.



ACBI-30, ACBI-36, ACBI-48, ACBI-48SB

Built-in Grill Covers

Custom-designed to fit your DCS Built-in Grill, these fully waterproof covers are constructed from PVC material with 400 denier polyester backing. The covers are rated UV Level 4, the highest UV protection available, and feature Anti-Cold-Crack (to -15°F) for colder climates. An innerflow section is built-in to the back of the cover for ventilation, ensuring they remain mildew and fungus free. Two robust stainless steel hanging eyelets ensure storage is easy.

DIMENSIONS

ACBI-48	ACBI-36
OVERALL HEIGHT 24½"	OVERALL HEIGHT 24½"
OVERALL WIDTH 49"	OVERALL WIDTH 37"
OVERALL DEPTH 26½"	OVERALL DEPTH 26½"

ACBI-48SB	ACBI-30
OVERALL HEIGHT 24½"	OVERALL HEIGHT 24½"
OVERALL WIDTH 49"	OVERALL WIDTH 31"
OVERALL DEPTH 26½"	OVERALL DEPTH 26½"



ACC-30, ACC-30SB, ACC-36, ACC-48, ACC-48SB

Freestanding Grill Covers

Custom-designed to fit your DCS Freestanding Grill, these fully waterproof covers are constructed from PVC material with 400 denier polyester backing. The covers are rated UV Level 4, the highest UV protection available, and feature Anti-Cold-Crack (to -15°F) for colder climates. An innerflow section is built-in to the back of the cover for ventilation, ensuring they remain mildew and fungus free. Two robust stainless steel hanging eyelets ensure storage is easy.

DIMENSIONS

ACC-48	ACC-30
OVERALL HEIGHT 47½"	OVERALL HEIGHT 47½"
OVERALL WIDTH 98"	OVERALL WIDTH 39½"
OVERALL DEPTH 26½"	OVERALL DEPTH 26½"

ACC-48SB	ACC-30SB
OVERALL HEIGHT 47½"	OVERALL HEIGHT 47½"
OVERALL WIDTH 98"	OVERALL WIDTH 59½"
OVERALL DEPTH 26½"	OVERALL DEPTH 26½"

ACC-36
OVERALL HEIGHT 47½"
OVERALL WIDTH 86"
OVERALL DEPTH 26½"



Customer Care

DCS Grills Built to Last Lifetime Warranty

DCS offers Lifetime Warranty on stainless steel Grill Burners, stainless steel Grill Covers, Burner Box, Grilling Grates and Grill Racks (except discoloration or surface corrosion) For complete DCS Grill Warranty refer to the Use & Care Guide.

A Peace-of-Mind Purchase Call 24 hours a Day, 7 Days a Week

Fisher & Paykel has a 24 hour toll-free service that allows you to speak direct to a customer care representative about any questions you might have about your DCS products. Our Customer Care Representatives can offer advice on which appliance will best suit your needs, and provide extensive product knowledge on how to use your current Fisher & Paykel and DCS products.

We can also advise on installations, schedule service with our Factory Service team (if available), and tell you where your nearest Authorized Service Center can be found. Nobody is better qualified to install, service, and repair your Fisher & Paykel and DCS household appliances than our network of specifically trained service technicians.

Email us at customercare@fisherpaykel.com
or call 24/7:

1 - 888 -
936 - 7872

Factory Service in Your Area Assistance & Complete Servicing

Factory Service is available in most metropolitan areas. Please visit dcsappliances.com/customersupport or call 1-888-936-7872 for current coverage.

We will recommend one of our Authorized Service Companies for areas where Factory Service is not available.

Easy Online Scheduling

Go to our website at dcsappliances.com

Click "Customer Care" from the top menu

Click "Service My Product" from the options available

Enter your zip code on the right side of the page

Factory Service Advantages

12 months part and labor warranty on all repairs

Full stock of parts on vehicles

Expert assistance on DCS and Fisher & Paykel products

Before and after sales service

Product education at the completion of service

24/7 booking service



dcsappliances.com
dcsappliances.ca

